

# POTTER & BRUMFIELD R10 SERIES RELAY

## SIGNAL RELAYS

### INTRODUCTION

TE Connectivity (TE)'s Potter & Brumfield R10 relay series is a versatile solution designed to meet a wide range of application needs. With multiple contact arrangements (1, 2, 4, and 6 Form C), the R10 series offers broad coil sensitivity options ranging from 25 to 750mW, making it suitable for both low-power and high-performance demands. The series supports various contacts capable of switching from dry circuits to loads up to 7.5 amps, ensuring reliable operation across diverse environments. Additionally, its numerous mounting and termination options provide flexibility for integration into complex systems.

### FEATURES

- 1, 2, 4 and 6 form C (CO) contact arrangement
- Broad range of coil options provides sensitivity ranging from 25 to 750mW
- Various contacts switch from dry circuit to 7.5 amps
- Many mounting and termination options

### APPLICATIONS

- Coin changers
- Audio equipment
- Elevators
- Traffic controls
- Ultrasonic test equipment
- Parking toll readers.



### APPROVALS

- UL E29244
- CSA LR15734

Technical data of approved types on request



#### Note:

- Version 100 A: Samples will be available in August 2025; and production starts in January 2026.

# POTTER & BRUMFIELD R10 SERIES RELAY

## Signal Relays

### CONTACT DATA

Contact arrangement	1, 2, 4 and 6 form C (CO)
Rated voltage	120VAC
Rated current	7.5A
Contact material	Ag, AgCdO, Au overlay Ag
Contact style	Single or bifurcated crossbar
Min. recommended contact load	
W type, AgCdO, single contact	300mA, 12VDC
X type, AgCdO, single contact	300mA, 12VDC
M type, AgCdO, bifurcated contact	300mA, 12VDC
Y type, Ag, single contact	100mA, 12VDC
Z type, Ag, bifurcated crossbar	1mA, 12VDC
P type, Au overlay Ag, bifurcated crossbar	dry circuit
Initial contact resistance	
All AgCdO contact types	100mΩ
All other contact materials and types	50mΩ
Frequency of operation	360 ops./hr

### CONTACT RATINGS

Type	Load	Cycles
<b>UL 508</b>		
<b>W type, AgCdO, single contact</b>		
	7.5A, 120VAC, resistive	
	7.5A, 28VDC, resistive	
	1/8HP, 120VAC, same polarity	
	1/6HP, 240VAC, same polarity	
<b>X type, AgCdO, single contact</b>		
	2A, 30VDC, resistive	100x10 <sup>3</sup>
	5A, 120VAC, resistive	6x10 <sup>3</sup>
	5A, 30VDC, resistive	100x10 <sup>3</sup>
	1/20HP, 120VAC, same polarity	
	1/10HP, 240VAC, same polarity	
<b>M type, AgCdO, bifurcated contact</b>		
	5A, 120VAC, resistive	6x10 <sup>3</sup>
	5A, 28VDC, resistive	6x10 <sup>3</sup>
<b>Y type, Ag, single contact</b>		
	2A, 120VAC	6x10 <sup>3</sup>
	2A, 28VDC	6x10 <sup>3</sup>
	250VA, 250VAC	30x10 <sup>3</sup>
	125VA, 125VAC	100x10 <sup>3</sup>
<b>Z type, Ag, bifurcated crossbar contact</b>		
	3A, 120VAC	6x10 <sup>3</sup>
	3A, 28VDC	6x10 <sup>3</sup> *
	2A, 30VDC	100x10 <sup>3</sup>
<b>P type, Au overlay Ag, bifurcated crossbar contact</b>		
	2A, 120VAC, resistive	100x10 <sup>3</sup>
	3 A, 120 VAC, resistive	6x10 <sup>3</sup>
	3 A, 30 VDC, resistive	100x10 <sup>3</sup>
Mechanical endurance	10x10 <sup>6</sup> ops., except W type is 1x10 <sup>6</sup> ops.	

# POTTER & BRUMFIELD R10 SERIES RELAY

Signal Relays

## COIL DATA

Coil voltage range	3 to 115VDC, 4.5mA to 20mA, 115VAC
--------------------	------------------------------------

## COIL VERSIONS, DC COIL

Coil code	Rated voltage VDC	Operate voltage VDC	Coil resistance $\Omega \pm 10\%$	Rated coil power mW	Coil code	Maximum coil current mADC	Operate current mADC	Coil resistance $\Omega \pm 10\%$	Pick-up coil power mW
<b>V - standard DC voltage adjustment 1, 2 and 4 pole</b>					<b>J - sensitive DC current adjustment</b>				
V28	5	3.75	28	900	<b>2 pole</b>				
V52	6	4.5	52	900	J1.0K	45	8.5	1000	75
V185	12	9	185	900	J5.0K	20	4.1	5000	85
V700	24	18	700	900	6 pole				
V2.5K	48	36	2500	900	J2.5K	28	10	2500	250
V15.0K	115	86	15000	900	<b>J - sensitive DC current adjustment - R10S types only</b>				
<b>6 pole</b>					<b>1 pole</b>				
V90	12	9	90	1,600	J1.0K <sup>1)</sup>	-	3.2	1000	10
V430	24	18	430	1,400	<b>J - sensitive DC current adjustment - R10S types only</b>				
V1.5K	48	36	1500	1,600	<b>2 pole</b>				
V9.0K	115	86	9000	1,500	J500 <sup>1)</sup>	-	6.3	500	20
<b>S - sensitive DC voltage adjustment 1 and 2 pole</b>					J1.0K	-	4.5	1000	20
S50	3	2.25	50	180	J5.0K	-	2	5000	20
S200	6	4.5	200	180	<b>4 pole</b>				
S800	12	9	800	180	J1.0K	-	6.5	1000	45
S3.2K	24	18	3200	180	<b>JJ - ultrasensitive DC current adjustment</b>				
<b>4 pole</b>					4 pole				
S1.8K	24	18	1800	350	JJ1.0K	45	9	1000	85
<b>SS - ultra sensitive DC voltage adjustment</b>					JJ2.5K	28	5.8	2500	85
<b>1 pole</b>									
SS1.0K	6	4.5	1000	40					


1) Suggested for 12VDC operation

## COIL VERSIONS, AC COIL (DUAL COIL DIODE RECTIFIED CONSTRUCTION)

Coil code	Rated voltage VAC	Operate voltage VAC	Coil resistance $\Omega \pm 20\%$
<b>Standard AC</b>			
<b>2 and 4 pole</b>			
115V	115	86	9000
<b>6 pole</b>			
115V	115	86	7500


OPERATIVE RANGE

R10 Relays (DC Only) Typical Ranges of Operations @ 25°C

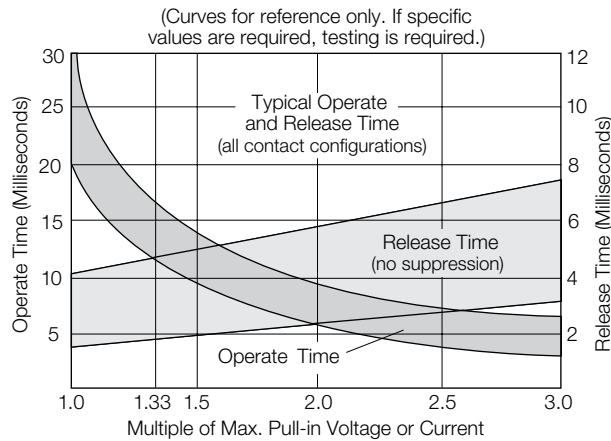


R10 ULTRA-SENSITIVE “SS” AND “JJ”

Typical Ranges of Operation @ 25°C

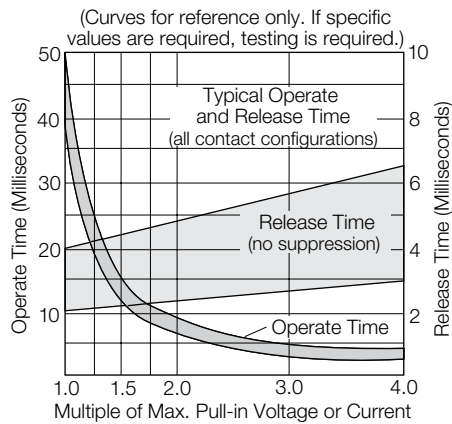

TYPICAL COIL INDUCTANCE

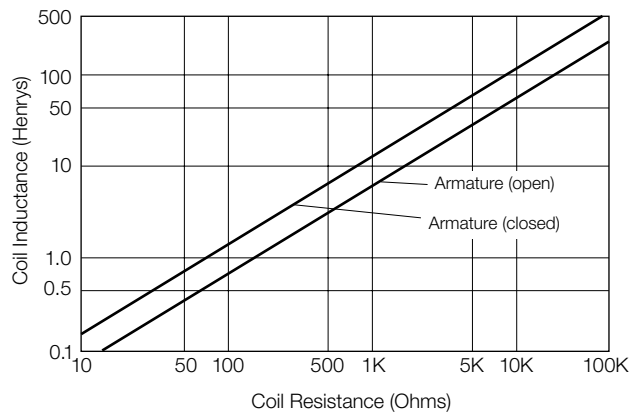

POTTER & BRUMFIELD R10 SERIES RELAY

Signal Relays

INSULATION DATA


Initial dielectric strength	
between open contacts	500Vrms
between contact and coil	1000Vrms
between adjacent contacts	1000Vrms
Initial insulation resistance	
between insulated elements	10GΩ, 500VDC

ACCESSORIES

For details see datasheet Sockets	Sockets and Accessories, R10 Relays
Product Code Description: Many versions of sockets and clips available.	


Note: Relays with contact current <50mA are not recommended for use in sockets.

DIMENSIONS

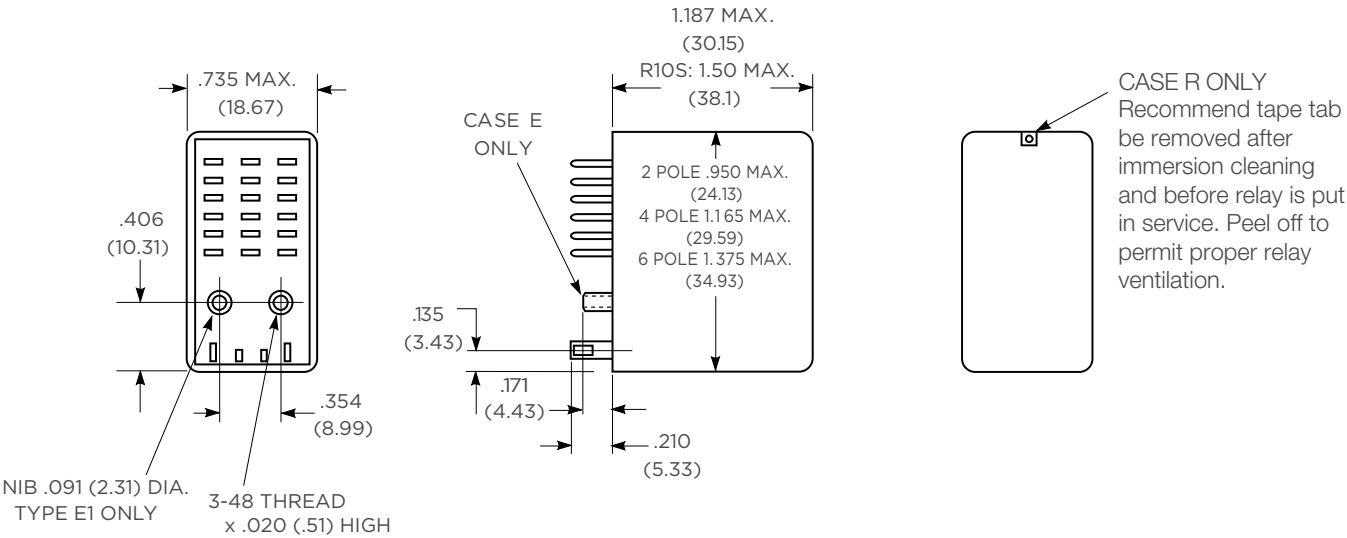


TERMINAL DIMENSIONS

SOLDER TERMINAL DIMENSIONS

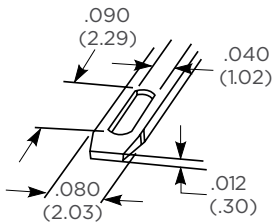


PRINTED CIRCUIT TERMINAL DIMENSIONS

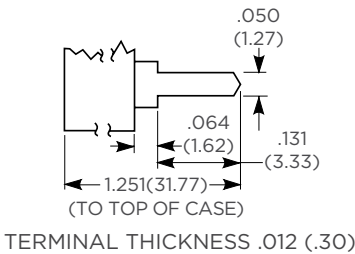


# POTTER & BRUMFIELD R10 SERIES RELAY

Signal Relays

## TERMINAL ASSIGNMENT

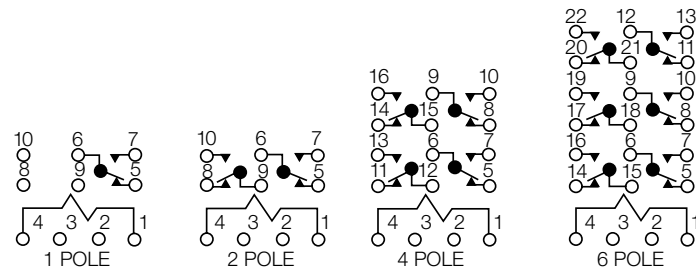


## R10 - AC COIL DIAGRAM




## PCB LAYOUT

### BOTTOM VIEW ON SOLDER PINS


Terminal Types E2 & R2  
(Omit unnecessary holes)

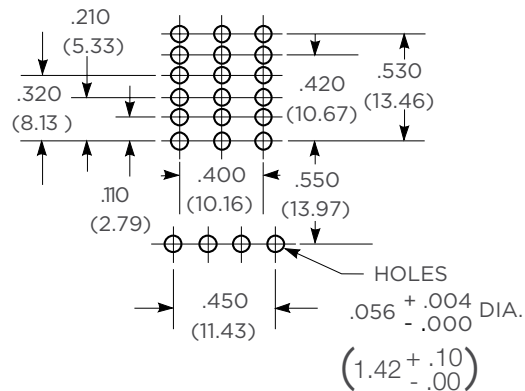

### SUGGESTED PANEL CUTOUT FOR RELAY

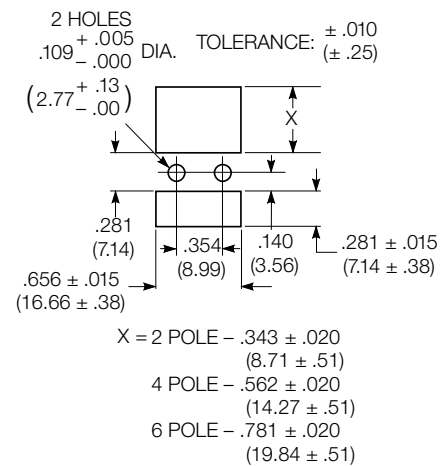

## PRODUCT CODE STRUCTURE

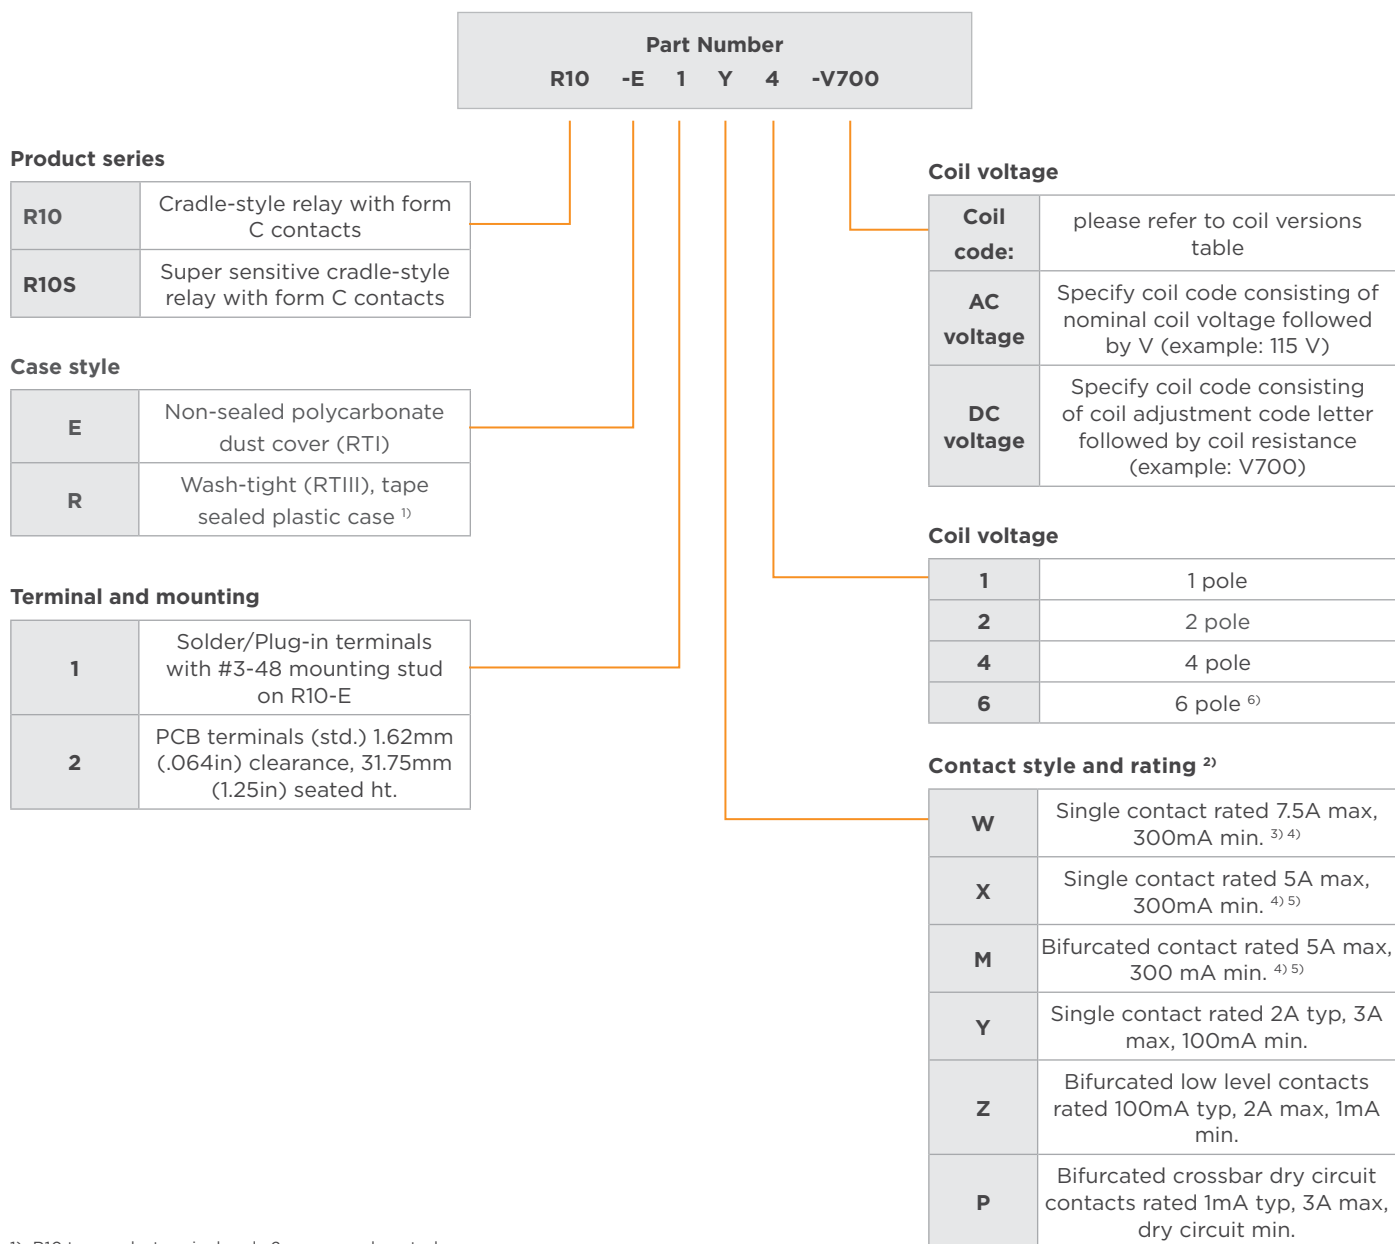

1) R10 type only, terminal code 2, no ground or stud.

2) Ratings are at 28VDCV or 115VAC. Total load must not exceed 30A per relay.

3) Use ungrounded frame for AC load of  $\geq 5A$ . Max ratings are 7.5A at 115VAC and 4A at 28VDC for coil codes S & J

4) Only available on R10 type, only available with coil adjustment code V, Q, S and J.

5) Use ungrounded frame for AC load of  $\geq 5A$ . Max ratings are 5A at 115VAC and 3A at 28VDC for coil codes S & J

6) Not available with contact code W

**te.com**

©2025 TE Connectivity Plc. All Rights Reserved.

TE Connectivity, TE connectivity (logo) and Every Connection Counts are trademarks owned or licensed by the TE Connectivity Plc. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any changes to the information contained herein without prior notice. TE Connectivity assumes only those obligations set forth in the terms and conditions for this product and shall in no event be liable for any incidental, indirect, or consequential damages arising out of the sale, resale, use, or misapplication of the product. TE expressly disclaims any implied warranties with respect to the information contained herein, including, but not limited to, implied warranties of merchantability or fitness for a particular purpose. Dimensions, specifications and/or information contained herein are for reference purposes only and are subject to change without notice. Consult TE for the latest dimensions, specifications and/or information. Users of TE Connectivity products must make their own assessment as to whether the respective product is suitable for the respective desired application.

02/25 ED

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[7-1393765-5](#) [9-1393765-5](#) [3-1393766-3](#) [1393769-2](#) [2-1393769-8](#) [7-1393769-0](#) [7-1393769-5](#) [R10-E2X2-V700](#)  
[R10-E1Y2-V700](#) [R10-E1X2-V700](#) [R10-E1X4-115V](#) [R10-E1Y4-V185](#) [R10-E1X4-V185](#) [R10-E1W2-V700](#) [R10-E1X4-](#)  
[V700](#) [R10-E1Y4-V700](#) [R10-E1X2-V185](#) [R10-E1Y2-V185](#) [R10-E2X2-V185](#) [R10-E1Y2-J5.0K](#) [R10-E1Y4-V2.5K](#) [R10-](#)  
[E1X2-115V](#) [R10-E1X6-V430](#) [R10-E1P4-V700](#) [R10-E1W4-V700](#) [R10-E1X2-S800](#) [R10-E1Y2-J1.0K](#) [R10-E1Z4-J1.0K](#)  
[R10-R2X2-V185](#) [R10S-E1Y2-J5.0K](#) [R10S-E1Y4-J1.0K](#) [R10-T1P2-115V](#) [R10-T1Y2-J1.0K](#) [R10-T1P2-V700](#) [R10-](#)  
[T2W3-J30.0K](#) [R10S-E1Y1-J1.0K](#) [R10-E1X4-V15.0K](#) [R10-E1P2-115V](#) [R10-E1P2-V700](#) [R10-E1P4-V185](#) [R10-E1P6-](#)  
[115V](#) [R10-E1W2-V185](#) [R10-E1W4-115V](#) [R10-E1X2-24V](#) [R10-E1X6-115V](#) [R10-E1X6-V90](#) [R10-E1Y1-SS220](#) [R10-](#)  
[E1Y2-V28](#) [R10-E1Y4-J10.0K](#) [R10-E1Y6-V1.5K](#) [R10-E1Y6-V430](#) [R10-E1Z2-V700](#) [R10-E1Z4-V185](#) [R10-E1Z4-V2.5K](#)  
[R10-E1Z4-V700](#) [R10-E1Z6-V430](#) [R10-E2W2-V185](#) [R10-E2X4-V700](#) [R10S-E1Y2-J1.0K](#)