

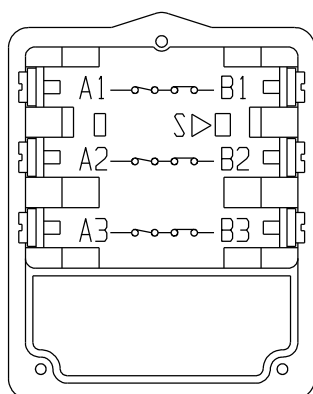


Comments:

Tightening torque
between 0.8 and
1.2 N.m





	Regulation	Security
Bulb:	Stain Copper	Stain Copper
Capillary:	Stain Copper	Stain Copper
Stem length	895 ±25mm	863 ±25mm
Sleeving length:	775 ±25mm	753 ±25mm
Sleeving:	PEr	PEr
Maxi bulb temp:	107°C	150°C

Standard packaging



NORMS:

-Approvals ENEC: EN60730-1
EN60730-2-9
T 105
20A 240V ~
15A 400V ~

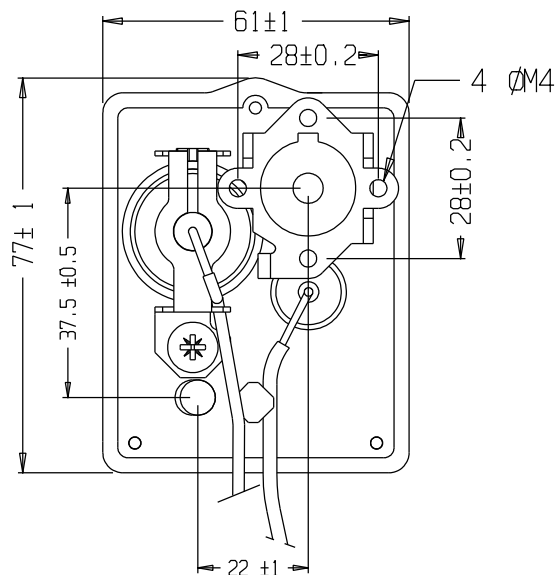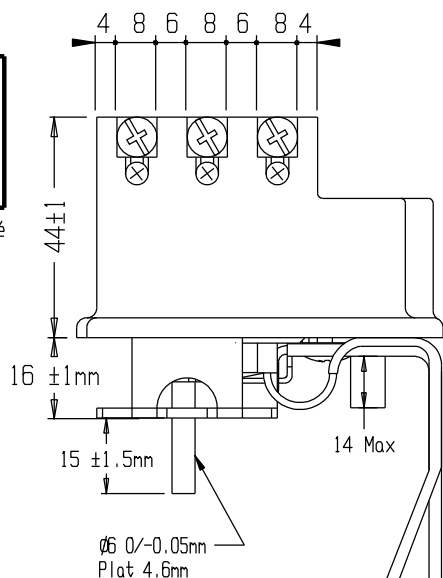

	Angular pos/BB	Regulation (°C)	Diff. (°C)
X	0	~ 5	
Y			
Z	270	75 ±5	Approx 9
Security			
95 ±5°C			

Preset in position: Z

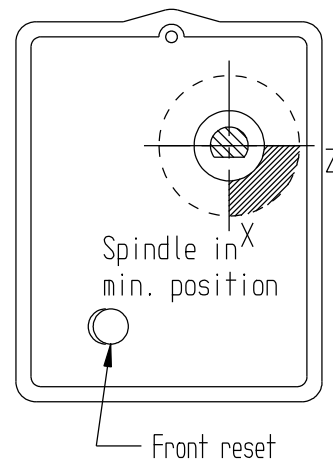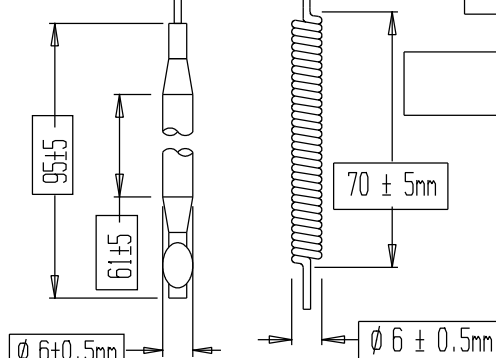

A	Modification of product marking	19/11/24	T.G.	20/11/24	N.T.
REF.	MODIFICATION	N°:MD21781	DATE	VISA	ACCEPTED ON
G.T: ±	DESIGNATION THERMOSTAT THREE-POLE CONTROL AND SAFETY 20A 240V, 15A 400V				
Scale: 1/1					
Drawn on: 18/01/19	By: M.R	CUSTOMER			BSDP0017
Approved: 21/01/19	By: E.B				

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF COTHERM COMPANY AND MUST NOT BE COPIED OR TRANSMITTED TO THIRD PARTIES.