


Technical drawing of a cable assembly. The drawing shows a cross-section of the cable and a side view of the assembly. The cross-section shows a central core with a diameter of $\varnothing 38.1 \pm 0.025$ and a central hole with a diameter of $\varnothing 6.35 \pm 0.013$. The side view shows a cable with a total length of 290 ± 5 . The cable is divided into three sections: a 80 mm section, an 80 mm section, and a 60 mm section. The cable is terminated with a connector that has four pins labeled: Blanc-vert, Vert, Blanc-rouge, and Rouge. The dimensions of the cable and connector are as follows:

- Overall length: 290 ± 5
- Section lengths: 80, 80, 60
- Outer diameter: $\varnothing 38.1 \pm 0.025$
- Inner diameter: $\varnothing 6.35 \pm 0.013$
- Wire diameter: $\varnothing 1.5$
- Wire spacing: 18.5 ± 0.3
- Wire offset: 4.8
- Wire offset: 1.5
- Wire offset: 20.6 ± 0.5
- Wire offset: 50.8

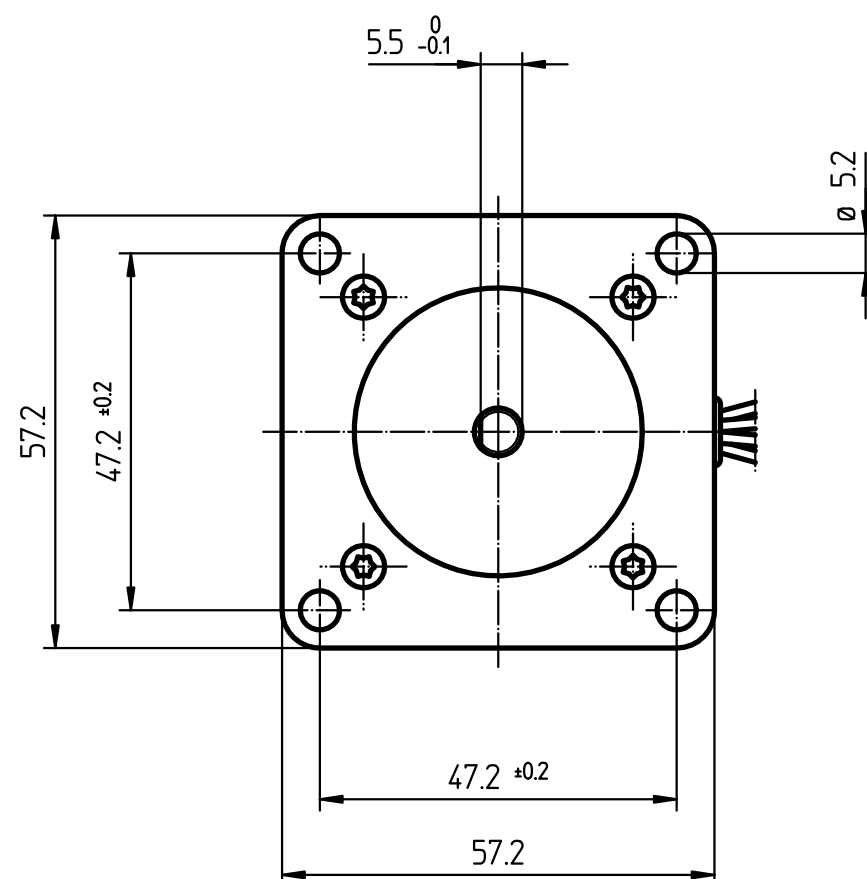

4 Câbles AWG 24 UL 1007
4 Contacts AMP 926885-1
3 Brides Panduit PLT 1 M-M
1 Connecteur AMP 926300-3

Nb de pces	Spécification			Position	Matière	Traitement thermique	Fini		
Distribution centre	Modification			Code mat. int.:		Tolérances générales (mm) DIN 7168			
520	ENCOMBREMENT 6600R192					≤ 6 ± 0.1	> 6 à 30 ± 0.2		
						> 30 à 120 ± 0.3	> 120 à 315 ± 0.5		
						Echelle 1:1		Remplacé par:	
						1:1		Remplace:	
						Dessiné	19.08.97	a j	
	 SONCEBOZ					Sonceboz SA CH-2605 Sonceboz			
						6600-1103.000			